

MB8000

Highly Integrated Wi-Fi/3G Mobile and Portable Office



Part Number: TGP 805283 XXX

Com Code: 1511132111

- Simple to Install/Maintain
- Ultimate Security and Reliability
- Low Total Cost for Service Provider and Enterprise
- Provides Wireless Internet Access Anywhere at Anytime

TOP Global's MobileBridge™ is a patented, mobile/portable wireless communication gateway. MobileBridge™ is the world's first and most integrated WLAN and 3G/4G WWAN solution for Enterprise, Mobile Hot Spots, and WISPs. It is secure, simple to use, and easily scalable to enable new applications of Wi-Fi.

Top Global's mobile hot Spot solution, MobileBridge™, combines the best of Wi-Fi technology and 3G/4G mobile communication technology. It leverages the existing and widely available 3G/4G infrastructures with flexible, low cost and simple to use WLAN technology for enterprise applications and for rapid deployment of hot spots anywhere around the world. The solution comes with a full compliment of software packages including security, network management, and AAA (Authentication, Authorization, Accounting) features.

Features of MB8000

The Most Convenient and Rapid Installation

Available instantaneously with only electric power required. Wired backhaul is not necessary. Total investment and time for the wireless network/Hot Spot construction could be reduced dramatically.

Top Security Design


MB8000 utilizes the WPA scheme and offers the secure "Always on, anywhere, anytime" wireless connectivity to subscribers. It also supports VPN and gives the Enterprise users maximum protection.

Flexible Management

MB8000 supports web based GUI management, remote centre management and command line management. And no client software is mandatory for management.

Ideal for Mobile and Remote Office

Mobile professionals can bring their own broadband wireless network while visiting clients or while working in remote locations.

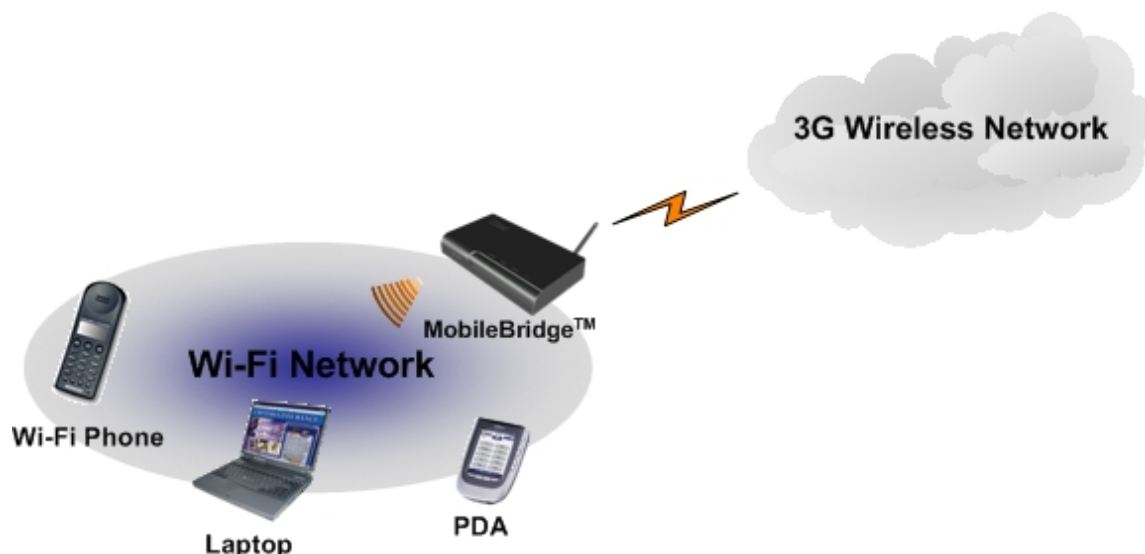

MB8000 Technical Specifications

Wireless

Supported PCMCIA Card List

EVDO	Sierra AC555, AC580, AC 595, PC5220; KYOCERA KPC650; NOVATEL V620, S720; Novatel EX720; Pantech PX500; Audiovox PC5220, PC5740, PC5750; YISO YISO; Novatel Merlin C386; Novatel C201
HSDPA	Sierra AC875, AC880, AC881; Novatel XU870, U730, U740; OPTION Globe Trotter GT Max, Globe Trotter HSDPA, Globe Trotter FUSION + HSDPA; Huawei E620, E660A; Vodafone Mobile Connect GT MAX 7.2; ZTE MF332; Emobile Japan D02NE
UMTS	Sierra AC750, AC775, AC850, AC860; Novatel Merlin U530, U630
EDGE	Option Globe Trotter EDGE

WLAN

- 802.11b
- Transmit power: 0 ~ 15 dBm
- Receiver sensitivity:
- 1 Mbps BPSK 8% PER -89 dBm

Networking

- DMZ Support
- NAPT between LAN and WWAN
- DHCP Server
- MAC access control
- IP Port Forwarding
- DNS Relay
- Bridge between LAN and WLAN
- Auto-Reconnect
- Always On
- Link Integrity
- Dial On Demand
- DDNS
- FTP
- OFDM Technology

MANAGEMENT

- HTTP server for web-based management
- Remote Centre Management
- SNMP V1/V2
- Standard and Extended MIBs
- TFTP
- Syslog
- CLI & Telnet Server for command line management
- Scan tool for upgrade management
- Customize splash page

SECURITY

- Wireless user isolation
- Access Control Table and RADIUS Authentication/Accounting
- 802.1x, TKIP support
- VPN End Point Feature, ESP/AH, 3DES/DES/MD5/SHA-1
- VPN pass-through for PPTP and IPSec
- HTTPS for Web management
- 64-bit WEP & 128-bit RC4 encryption
- WPA and WPA PSK
- Web Portal
- Password protected for web access
- Closed system

INTERFACE

Wired:	10/100Base-T (LAN)
Wireless:	3G/4G Cellular Network PCMCIA Slot IEEE 802.11b/g embedded
Serial:	D-Sub RS232 connector

ENVIRONMENT SPECIFICATIONS

	Temperature	Humidity
Operating:	0-50°C	90% (Non-Condensing)
Storage	-20-75°C	90% (Non-Condensing)

POWER SUPPLY

100/240 VAC high qualities and worldwide safety approval

LEDS

4LEDs	Power 3G/4G Cellular Network Activity Wi-Fi Activity Wired Ethernet
-------	--

PHYSICAL

Dimension	258 (L) × 145 (W) × 39 (H) mm
Weight	0.80 kg

WARRANTY

1 year